GE
Lighting

OEM Installation Guide

IMMERSION™

LED Refrigerated Display Lighting

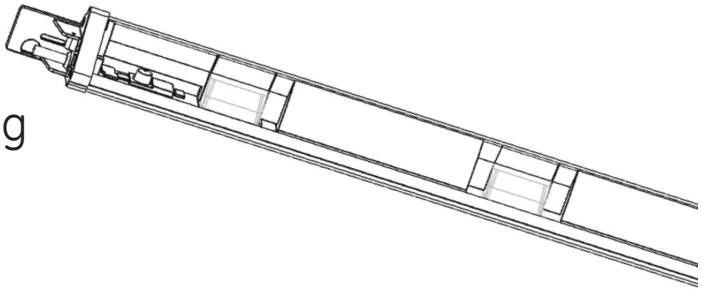

Vertical Cases
RV60 Series

End Mullion Lights

48-inch: GELT604850EDR-SY/-SB (85743/85746), GELT604850EDL-SY/-SB (85744/85747), GELT604840EDR-SY/-SB (85749/85752), GELT604840EDL-SY/-SB (85750/85753), GELT604835EDR-SY/-SB (85755/85758), GELT604835EDL-SY/-SB (85756/85759)

60-inch: GELT606050EDR-SY/-SB (85700/85703), GELT606050EDL-SY/-SB (85701/85704), GELT606040EDR-SY/-SB (85706/85709), GELT606040EDL-SY/-SB (85707/85710), GELT606035EDR-SY/-SB (85712/85715), GELT606035EDL-SY/-SB (85713/85716)

67-inch: GELT606750EDR-SY/-SB (85720/85723), GELT606750EDL-SY/-SB (85721/85724), GELT606740EDR-SY/-SB (85726/85734), GELT606740EDL-SY/-SB (85727/85735), GELT606735EDR-SY/-SB (85737/85740), GELT606735EDL-SY/-SB (85738/85741)

Description Code (Single Unit Product Number/10-Pack Product Number)

BEFORE YOU BEGIN

Read these instructions completely and carefully.

FOR YOUR SAFETY

Read and observe all CAUTIONS and WARNINGS shown throughout these instructions.

- Installation to be performed by factory trained service personnel only.
- For use inside a commercial refrigeration case with packaged foods only.
- Use this unit only in the manner intended by the manufacturer. If you have any questions, contact the manufacturer.
- Before installing, servicing or cleaning unit, switch power off at the service panel and follow appropriate lock out/tag out safety procedures

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

PREPARE ELECTRICAL WIRING

Electrical Requirements

- The power supply must be supplied with 100-240 VAC, 50/60 Hz, and connected to an individual properly grounded branch circuit, protected by a 15 or 20 ampere circuit breaker or time delay fuse.
- Wiring must be 2 wire with ground and rated for 75°C (167°F).
- Do not overload driver, follow installation instructions for the GEPS6000NCMUL-SY or GEPS6500NCMUL-SY.
- Ensure that all connection points are sealed for damp location using the appropriate method per the NEC or local electrical code.

LED DRIVER COMPATIBILITY

This system is compatible with **GEPS6000NCMUL-SY** or **GEPS6500NCMUL-SY LED Driver.** Please refer to the separate LED driver installation guide for appropriate wiring connections.

⚠ CAUTION/ATTENTION

Risk of injury. While performing installations described, gloves, safety glasses or goggles should be worn. / **Risque de blessure.** Lors de l'exécution des installations décrites, des gants, des lunettes de sécurité ou des lunettes de protection doivent être portées.

⚠ WARNING/AVERTISSEMENT

Risk of electrical shock. Disconnect power before servicing or installing product. / **Risque de choc électrique.** Couper le courant avant de réparer ou installer le produit.

imagination at work

Tools Required

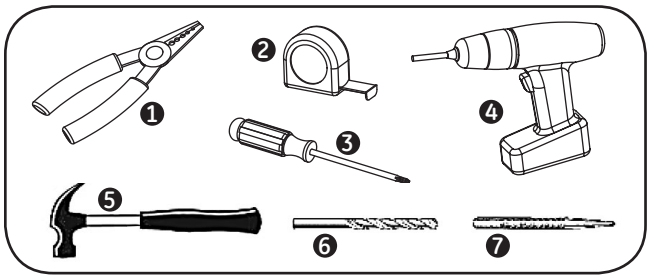

1. Wire stripper/cutter
2. Tape measure
3. Screwdriver
4. Cordless drill
5. Hammer
6. 7/64-inch (2.8mm) drill bit
7. Center punch

Components Required

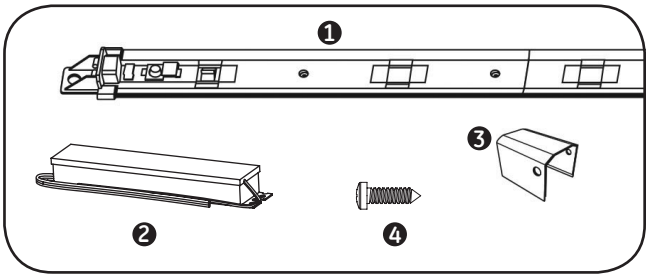

1. LED light
2. LED driver
3. Wire cover
4. 6-32 x 1/2" screws

⚠ WARNING/AVERTISSEMENT

Risk of fire or electric shock. Luminaire wiring and electrical parts may be damaged when drilling for installation of LED retrofit kit. Check for enclosed wiring and components. / **Risque de feu ou électrocution.** Les pièces et câbles électriques risquent d'être endommagés lors du perçage des trous pour l'installation du luminaire à DEL. Veuillez vérifier si des câbles et composantes se trouvent derrière la paroi avant de percer.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects. / Pour éviter l'endommagement de câblage ou l'abrasion, ne pas exposer le câblage aux bords de feuilles de métal ou d'autres objets tranchants.

1A Prepare for Installation of End LED Lights

- Measure 1 3/32-inches (28 mm) from the edge of the mullion nearest the door, and mark a vertical line near the top and bottom of the frame mullion.
- Prepare for the upper end of the End LED Light. Mark a horizontal line a minimum 2 1/8-inches (54 mm) from the top of the door opening, and another horizontal line 3/8-inches (10 mm) below this line.
- Prepare for the lower end of the End LED Light.
  - — For 48-inch LED Lights mark a horizontal line 46 1/4" (1175mm) beneath the first line drawn for the top Mounting Tab.
  - — For 60-inch LED Lights mark a horizontal line 58 3/32" (1476mm) beneath the first line drawn for the top Mounting Tab.
  - — For 67-inch LED Lights, mark a horizontal line 65 15/32" (1663mm) beneath the first line drawn for the top Mounting Tab.

  Then mark another line 3/8-inches (10 mm) below this line.
- Center the center punch directly at the intersection of the horizontal lines and the vertical line (top and bottom) and establish a dimple.
- Use power drill and 7/64-inch (2.8 mm) drill bit to drill holes at the intersection of the vertical center line and the horizontal lines.
- Repeat these steps for the mullion on the other end of the case.

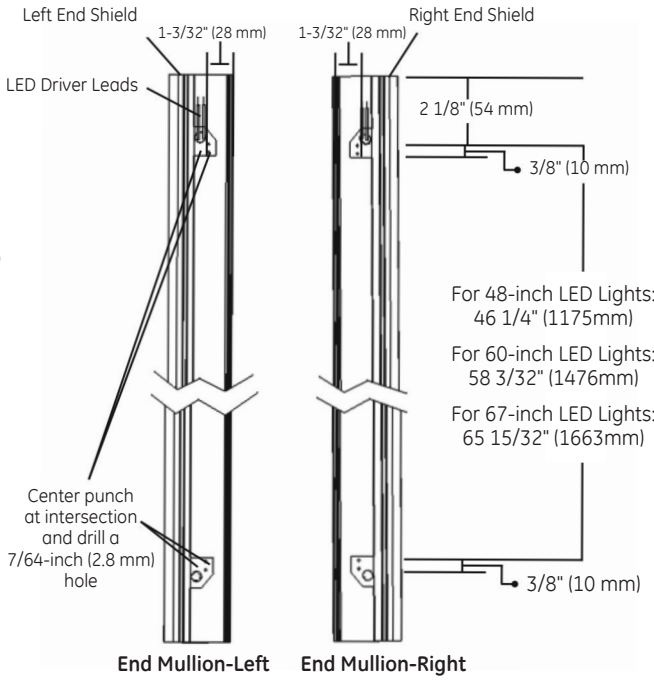
Left End Shield
1-3/32" (28 mm)
LED Driver Leads
Center punch at intersection and drill a 7/64-inch (2.8 mm) hole
End Mullion-Left
Right End Shield
1-3/32" (28 mm)
2 1/8" (54 mm)
3/8" (10 mm)
For 48-inch LED Lights: 46 1/4" (1175mm)
For 60-inch LED Lights: 58 3/32" (1476mm)
For 67-inch LED Lights: 65 15/32" (1663mm)
3/8" (10 mm)
End Mullion-Right

View from inside case looking out

1B Identify End LED Light- Right from Left

- Verify LEDs are directed towards the center of the case before installing.

NOTE: Installing the LED Light on the wrong side will result in very low light level inside the refrigerated case.

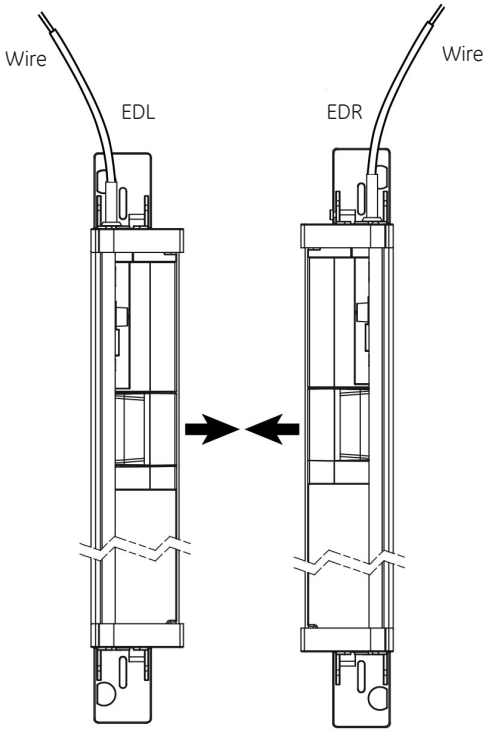

View from inside case looking out

⚠ WARNING/AVERTISSEMENT

Risk of electrical shock. Only those open holes indicated in the photographs and/or drawings may be made or altered as a result of kit installation. Do not leave any other open holes in an enclosure of wiring or electric components / **Risque de choc électrique.** Seuls les trous ouverts indiqués dans les photos et / ou les dessins peuvent être faites ou modifiés à la suite du montage du kit. Ne pas laisser autres trous ouverts dans l'enceinte du câblage électrique ou composants.

2 Install End LED Lights

- Place proper End LED Light against the face of the mullion near the two holes drilled at the top.

  NOTE: Refer to proper End LED Light orientation depicted in Step 1B.
- Insert a #6-32 x 1/2-inch sheet metal screw into the slot of the Mounting Tab on the End LED Light, and into the first hole that was drilled in the end mullion.
- Use a screwdriver to start threading the screw into the drilled hole.
- Repeat for the second screw, and for the bottom of the End LED Light.
- Repeat these steps for the mullion on the other end of the case. Make sure the orientation is correct and proper LED Light is used.
- Refer to the manufacturing manual for door frame to ensure there are no components contained inside the mullion that could be drilled through. Use a #6 - 3/4-inch self-drilling screw to attach the End LED Light into one or two of the additional mounting holes located near the center of the LED Light.
- Refer to wiring diagram on page 5. Connect the red and black output wires from the LED Light to the red and black wires on the LED Driver using the twist lock splice wire connectors provided.

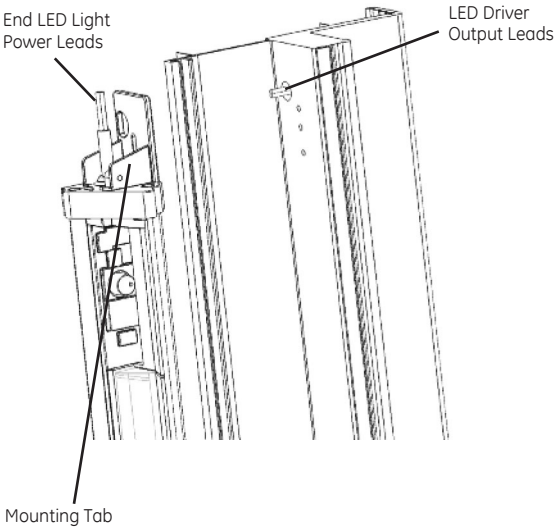

⚠ CAUTION/ATTENTION
Risk of injury. Do not overload LED Driver. Do not exceed limits shown in “Maximum LED Driver Loading” table below. **Risque de blessure**. Ne pas surcharger l'alimentation. Ne pas exéder les limites de la table ci-dessous: “Charges maximales pour les alimentations.”

LED Driver Configuration Options

Both 50-watt and 100-watt LED Drivers are available for a variety of case configurations.

Maximum LED Driver Loading

	50W Driver	100W Driver
60-inch LED Lights	3 Center + 1 End	7 Center
67-inch LED Lights	3 Center	6 Center
48-inch LED Lights	4 Center	8 Center

(1 Center may be substituted by 2 End LED lights)

Parts Needed Per Case

	6-Door	5-Door	4-Door	3-Door	2-Door
Center LED Lights	5	4	3	2	1
End LED Light Sets	1	1	1	1	1
Wire Covers	7	6	5	4	3
Using 50W LED Drivers					
LED Drivers (60-inch LED Lights)	2	2	2	1	1
LED Drivers (67-inch LED Lights)	2	2	2	1	1
LED Drivers (48-inch LED Lights)	2	2	1	1	1
Using 100W LED Drivers					
LED Drivers (60-inch LED Lights)	1	1	1	1	1
LED Drivers (67-inch LED Lights)	2	1	1	1	1
LED Drivers (48-inch LED Lights)	1	1	1	1	1

⚠ WARNING/AVERTISSEMENT

Risk of electrical shock. Ensure that all connection points are sealed for damp location using the appropriate method per the NEC or local electrical code. **Risque de choc électrique**. S'assurer que les points de raccordements sont scellés pour emplacement humide en employant une méthode permise par le NEC ou par le code électrique local.

3 Connection Configurations

Multiple LED Light's electrical input should be in parallel connection to an LED driver's output as shown by the example wiring diagram below. Refer to "Maximum LED Driver Loading" table to determine maximum number of LED lights per LED driver.

One End Set (Right and Left) & One Center LED Light

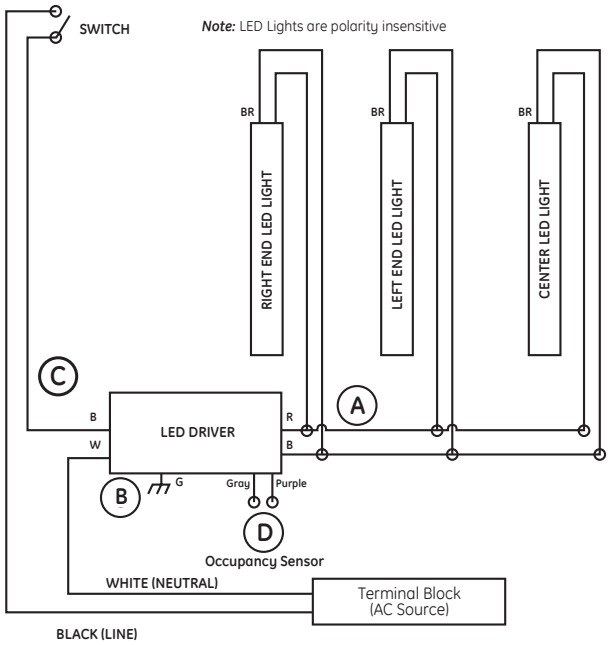

Driver Wire Connector Cavities
39-01-4030 (AC)
Cavity 1 - Line 1 (Black) Cavity 2 - Earth Ground (Green) Cavity 3 - Neutral or Line 2 (White)
39-01-4046 (DC)
Cavity 1 - Output DC (+) (Red) Cavity 2 - Output DC (-) (Black) Cavity 3 - Dimming (Purple) Cavity 4 - Dimming (Gray)

For information on A, B, C, D, see Steps 4, 5 and 6.

4 Connect LED Driver - Output

• Make output (DC) connections using one of the two options below:

OPTION 1 – USING 4-WAY CONNECTOR

Connect the LED Driver output leads to the LED Light leads using the appropriate mating connector (Molex P/N 39-01-4046). Terminals installed should be crimped using approved tooling and process per Molex specifications. Ensure that the connector cavities are correctly populated per the wire cavity table on page 5. (A)

OPTION 2 – USING TWIST-ON WIRE CONNECTORS

Remove the 4-way connector from the LED Driver by cutting the wires near the connector and strip the output leads. Using the appropriate wiring diagram on page 5, connect the LED Driver output leads to the LED Light leads using wire connectors or other connection method approved for low temperature usage and stranded cable. (A)

For non-dimming applications, cap the unused wires with 5/32" (4mm) twist on wire connectors.

5 Connect LED Driver - Input

• Make input (AC) connections using one of the two options below:

• The LED Driver is required to be reliably bonded to the protective ground conductor. (B)

OPTION 1 - USING 2-WAY CONNECTOR

Attach the supplied green/yellow ground wire from the LED Driver to a grounded metal portion of the door frame. Connect the original Line and neutral wires (or Line 1 and Line 2 wires for 240 nominal VAC) to the 3-way connector for the LED Driver input wires using the appropriate mating connector (Molex P/N 39-01-4030). Ensure that the connector cavities are correctly populated per the wire cavity table on p. 5. (C)

OPTION 2 – USING TWIST-ON WIRE CONNECTOR

Attach the supplied green/yellow ground wire from the LED Driver to a grounded metal portion of the door frame. Remove the 3-way connector from the LED Driver by cutting the wires near the connector and strip the input wires. Using the appropriate wiring diagram on page 5, connect the original Line and neutral wires (or Line 1 and Line 2 wires for 240 nominal VAC) to the LED Driver leads using twist lock wire connectors or other connection method approved for low temperature usage and stranded cable. Ensure that the connector cavities are correctly populated per wire cavity table on page 5. (C)

6 Connect Dimming Contacts – Output (Optional)

• To enable dimming operation, connect leads from occupancy sensor or control system (normally open contact) to the purple and gray leads of the power supply. Other methods, such as using occupancy sensors to switch the LED driver on and off is not recommended and will void the product warranty.

• Make output (contact closure) connections using one of the two options below:

OPTION 1 - USING 4-WAY CONNECTOR

Connect the LED Driver dimming output leads to the occupancy sensor or control system using the appropriate mating connector (Molex P/N 39-01-4046). Terminals installed should be crimped using approved tooling and process per Molex specifications. Ensure that the connector cavities are correctly populated per the wire cavity table on page 5. (D)

OPTION 2 – USING TWIST-ON WIRE CONNECTORS

Remove the 4-way connector from the LED Driver by cutting the wires near the connector and strip the output leads. Using the appropriate wiring diagram on page 5, connect the LED Driver dimming output leads to the occupancy sensor or control system using wire connectors or other connection method approved for low temperature usage and stranded cable. (D)

• The **GEPS6000NCMUL-SY** or **GEPS6500NCMUL-SY** LED Driver is capable of step dimming from 100% power to 20% power when used with a normally open contact closure occupancy sensor system.

• **When using the GEPS6000NCMUL-SY** or **GEPS6500NCMUL-SY for dimming applications,** the slider switch setting must be set to the right to disable the dimming feature and achieve 100% illumination.

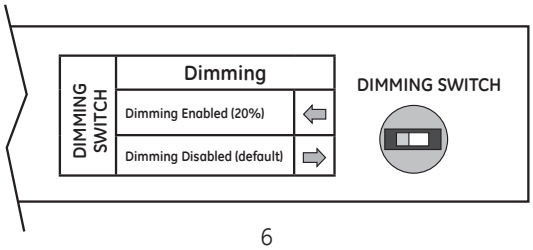

⚠ CAUTION/ATTENTION

Risk of electrical shock. Plastic cover is needed to protect electrical wires from tampering and accidental contact. / **Risque de choc électrique.** Le couvercle en plastique est requis pour assurer une protection adéquate contre l'accès aux fils et les contacts accidentels.

7 Attach Covers to End Cap

- Tuck wires underneath Wire Cover before placing it over the End Cap and Mounting Tab.
- Attach Wire Cover to LED Light End Cap by installing a M2.9x10 pan head tapping screw (provided) through the hole in the End Cap and Mounting Tab using an installation torque of 3 lbf-in.

  NOTE: Tighten slowly until fully seated, do not over tighten or strip the threads.
- Repeat these steps for the mullion on the other end of the case.

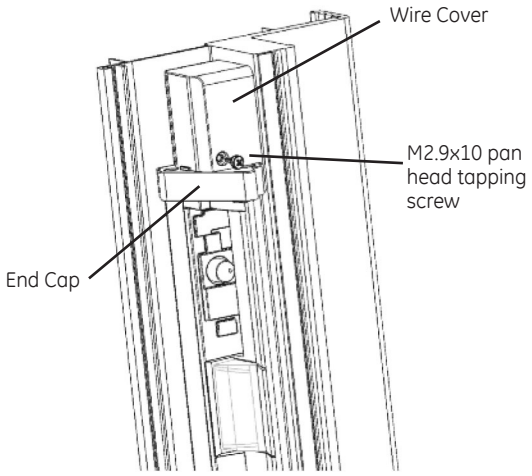

⚠ CAUTION/ATTENTION

Risk of electrical shock. Plastic cover is needed to protect electrical wires from tampering and accidental contact. / **Risque de choc électrique.** Le couvercle en plastique est requis pour assurer une protection adéquate contre l'accès aux fils et les contacts accidentels.

8 Removal Instructions

- Using a phillips screwdriver, remove screw and cover from wire end of LED Light and screw from opposite end of LED Light.
- Electrical connections can be removed to facilitate the removal of the LED Light.
- Remove the #6-32 x 1/2 inch sheet metal screws that hold the LED Light to the mullion. Make sure you support the End LED Light with your free hand.
- Repeat these steps for the mullion on the other end of the case.

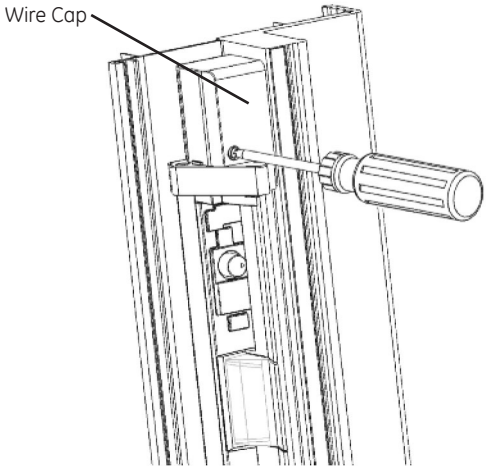

⚠ WARNING/AVERTISSEMENT

Risk of electrical shock. Disconnect power to LED Lights before any cleaning operation.
Risque de choc électrique. SDébranchez l'alimentation des éclairages à LED avant toute opération de nettoyage.

9 LED Refrigerated Display Lights – Cleaning Instructions

- The outer lens and the plastic housing should be cleaned periodically with a mild liquid dish detergent.
- Do not use chemical cleaners to clean the lens.
- Keep the outside clean. Wipe with a clean cloth lightly dampened with mild liquid dish detergent. Dry with a clean, soft cloth.
- Do not wipe the lens with a soiled dish cloth or wet towel. These may leave a residue that can damage the finish.
- Do not use scouring pads, powdered cleaners, bleach or cleaners containing bleach because these products can scratch and damage the finish.

This product is intended solely for the use of commercial refrigerated, display or case lighting and is not intended for use in any other application.

GE Lighting Solutions • 1-888-MY-GE-LED **(1-888-69-43-533)** • www.gelighting.com

GE Lighting Solutions, LLC is a subsidiary of the General Electric Company. Immersion is a trademark of GE Lighting. The GE brand and logo are trademarks of the General Electric Company. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.

© 2013 GE 63540 121013